



Direct Channel Worldwide Corp.

8F., No. 14, San Ming Rd., Shindian City, Taipei County 231,
Taiwan (R.O.C)
T: 886 2 8911 3828 F: 886 2 8911 3829

Features

- Metal of siliconrectifier, majonty carrier conducton
- Guard ring for transient protection
- Low power loss high efficiency
- High surge capacity, High current capability

Maximum Ratings

- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +175°C

Item Number	Device Marking	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
MBR1030CT	MBR1030CT	30V	21V	30V
MBR1035CT	MBR1035CT	35V	24.5V	35V
MBR1040CT	MBR1040CT	40V	28V	40V
MBR1045CT	MBR1045CT	45V	31.5V	45V
MBR1050CT	MBR1050CT	50V	35V	50V
MBR1060CT	MBR1060CT	60V	42V	60V

Electrical Characteristics @ 25°C Unless Otherwise Specified



Average Forward Current	$I_{F(AV)}$	10A	$T_C = 105^\circ\text{C}$
Peak Forward Surge Current	I_{FSM}	125A	8.3ms, half sine
Maximum Forward Voltage Drop Per Element MBR1030CT-45CT MBR1050CT-60CT MBR1030CT-45CT MBR1050CT-60CT	V_F	.70V .80V .57V .65V	$I_{FM} = 5A$ $T_J = 25^\circ\text{C}$ $I_{FM} = 5A$ $T_J = 125^\circ\text{C}$
Maximum DC Reverse Current At Rated DC Blocking Voltage	IR	0.1mA 15mA	$T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$
Typical Junction Capacitance MBR1030CT-45CT MBR1050CT-60CT	C_J	170pF 220pF	Measured at 1.0MHz, $V_R=4.0V$

*Pulse test: Pulse width 300 μsec , Duty cycle 2%

MBR1030CT THRU MBR1060CT

10 Amp Schottky Barrier Rectifier 30-60 Volts

TO-220AB

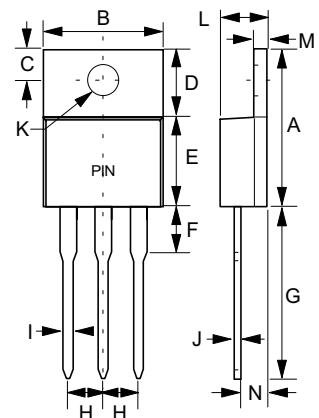

DIM	DIMENSIONS				NOTE
	INCHES		MM		
A	.560	.625	14.22	15.88	
B	.380	.420	9.65	10.67	
C	.100	.135	2.54	3.43	
D	.230	.270	5.84	6.86	
E	.380	.420	9.65	10.67	
F	-----	.250	-----	6.35	
G	.500	.580	12.70	14.73	
H	.090	.110	2.29	2.79	
I	.020	.045	0.51	1.14	
J	.012	.025	0.30	0.64	
K	.139	.161	3.53	4.09	∅
L	.140	.190	3.56	4.83	
M	.045	.055	1.14	1.40	
N	.080	.115	2.03	2.92	

Direct Channel Worldwide Corp.

www.directchannel.com.tw

Tel:886(0)2-89113828 Fax:886(0)2-89113829 Email: sales@directchannel.com.tw

RATING AND CHARACTERISTIC CURVES
MBR1030CT thru MBR1060CT

FIG. 1 - FORWARD CURRENT DERATING CURVE

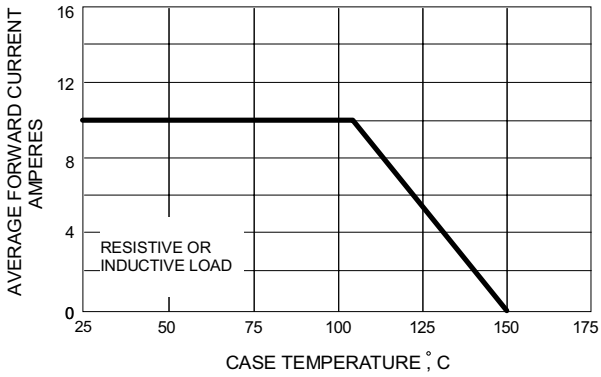


FIG. 2 - MAXIMUM NON-REPETITIVE SURGE CURRENT

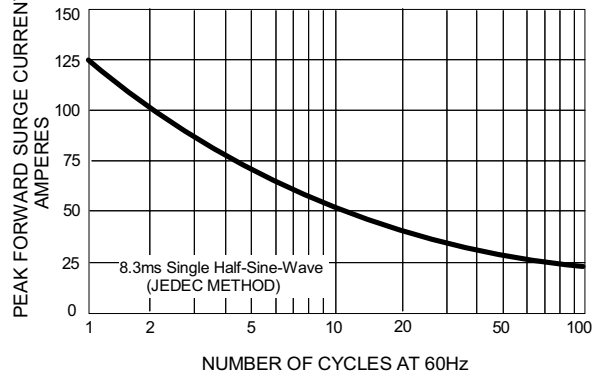


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

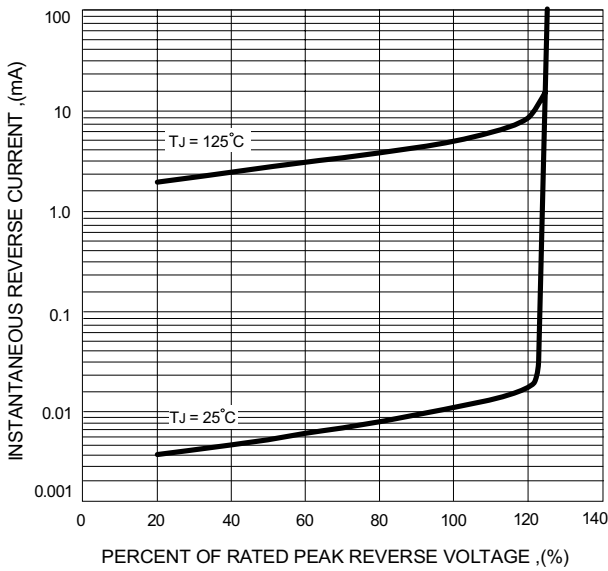


FIG. 4 - TYPICAL FORWARD CHARACTERISTICS

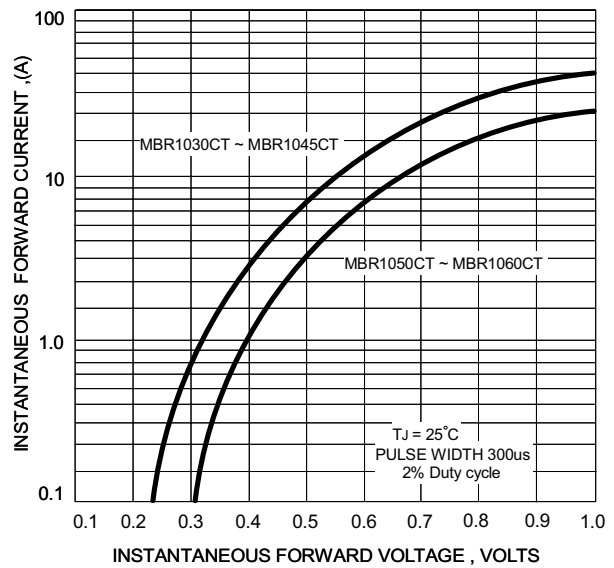


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

